

Instructions

Rear Diff Bushings

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Page 1 of 2 -

Application - Nissan 300ZX
- 1989-1996

Always refer complete catalogue listing

- Raise vehicle evenly and safely support.


Never rely on a Jack only

Contents - Bushing 91428 x2
- Bushing 91429 x2
- Bushing 91862 x2
- Steel tube 19x13.2x43 x2
- Grease



- Use a stand to support Diff prior to removal.
- The front bushings can be hit out with a hammer and socket - refer LH image.
- Remove and discard bushing including lower rubber washer.
- Once old bushings are removed, clean diff housing of any oil or dirt.

IMPORTANT - remove rubber from OE upper washer and re-use on top of bushing 91428

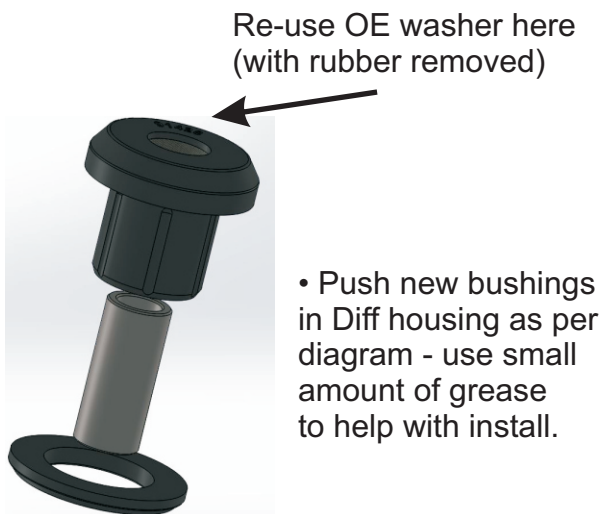

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.

Instructions

Rear Diff Bushings

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.


Page 2 of 2



- The Diff will have to be removed to remove rear bushings.

Note - mark drive-shafts with diff flanges - to make sure they are bolted back in same spot.

- Remove old bushings - use a chisel to push in outer shell OR drill out rubber with hole-saw. Use hack-saw to cut a slit in outer steel shell.

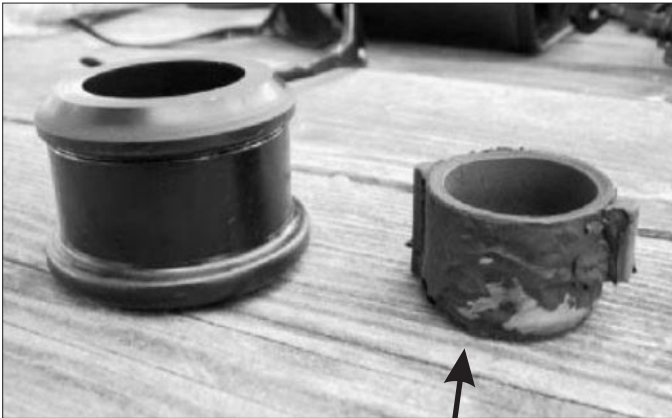

IMPORTANT - re-use the OE inner steel tube. you will have to remove this from the old bushing - and remove old rubber

- Push new supplied bushing 91862 into sub-frame. Soapy water will help pop it in.
- Grease bushing internal diameter with supplied grease only.
- Bolt diff back in vehicle with original bolts.
- Re-check all bolts after 100kms travelled.

