

Instructions

Lower Engine Mount Bushing

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Install Guide

1. Raise vehicle evenly and safely support.

Note - the engine will need to be secured with appropriate equipment prior to cross-member removal.

2. Remove lower cross-member.

3. The bushing will need to be pressed out, alternatively cut the outer steel shell with a Air-hacksaw.

4. Press supplied bushing into housing - this is best done with soapy water and flat surface.


5. Push in supplied steel tube. Re-fit cross-member to vehicle.

6. Re-check bolts after 100kms travelled.

Application - Nissan Sentra 2002 - 06

(Refer current catalogue for complete listing)

Contents - Bushing 90660 x 1
- Steel tube x 1

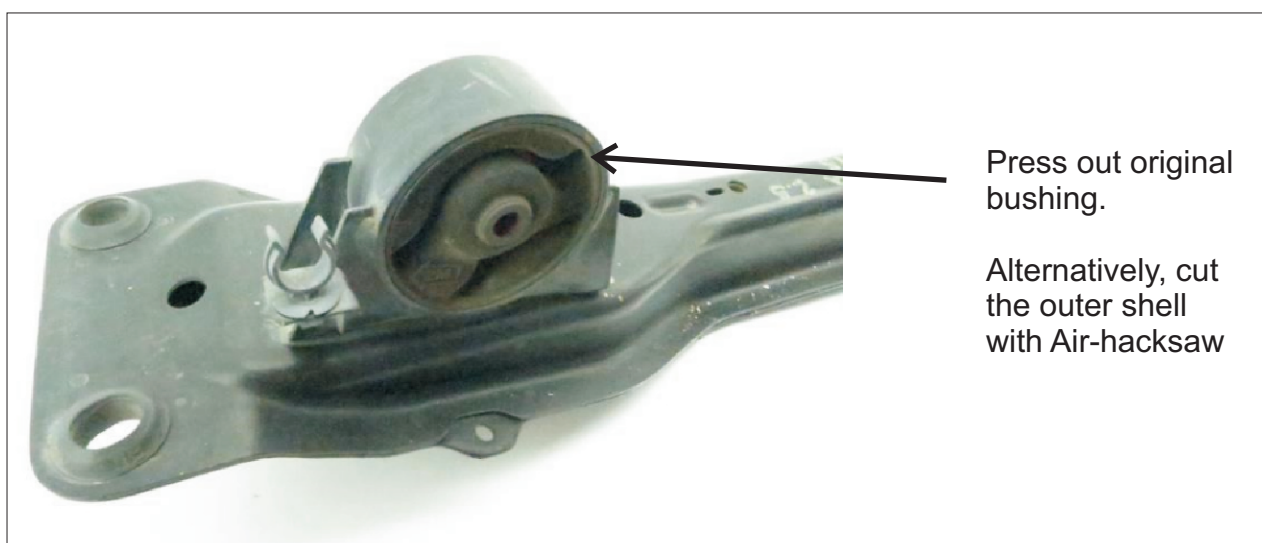

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.