

Instructions

Engine Mount Inserts

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Application - Honda Prelude
- 1992-2001


Always refer complete catalogue listing

Contents - Insert 91549
- Insert 91550
- Insert 91551
- Insert 91552

- Remove only 1 mount at a time.
- A Jack and timber may be used to balance motor when required - careful to not lift too high.
- Don't jack under engine pulleys.
- Careful when working near hot areas such as radiators or exhausts.
- After removal of mount - check mount is still serviceable. Small cracks are OK. if mount has large cracks, replace mount.
- Clean mount prior to insert install.

NOTE - new inserts may lift engine height - check for clearance when closing bonnet.

- Grease or silicone spray may help with install.
- Re-check all bolts after 100kms travelled.

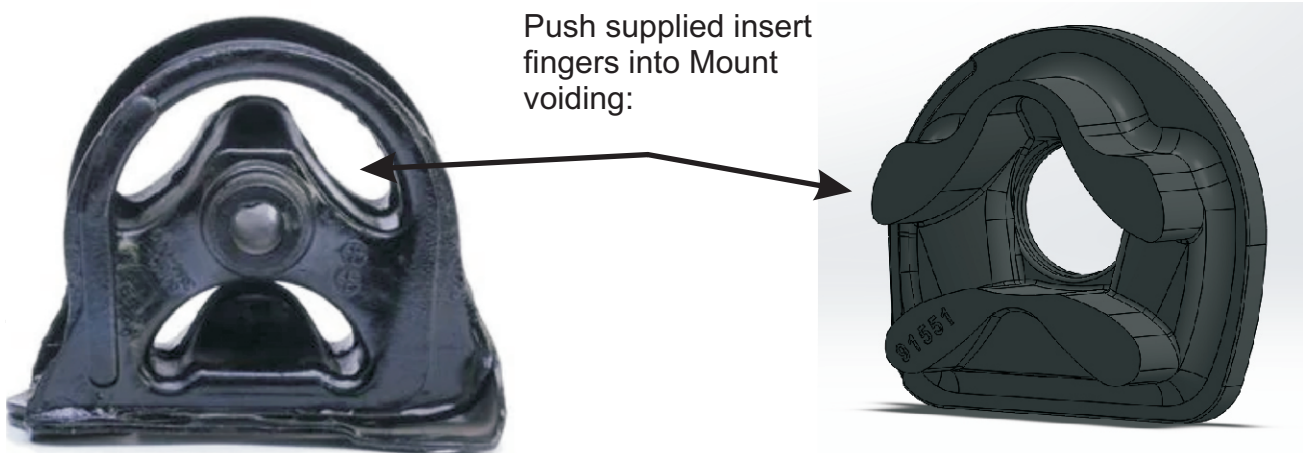

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.