

Instructions

Cross-member/Engine Mount Bushings

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

- Raise vehicle evenly and safely support.

Never rely on a Jack only

- A Press will be required to press old bushings out. Press old bushings out including steel outer shell. Alternatively use a hack-saw to cut outer steel shell - careful to not damage mount.

- Clean mount Eye of any burrs, dirt and oil.

- Press engine mount bushings in with soapy water. Add small amount of grease to bushings internal diameter.

- Push in supplied steel tubes. Refer images below.



- Re-fit Cross-member to vehicle.

- Re-check all bolts after 100kms

Application - Mitsubishi Eclipse
- 2006-07

Always refer complete catalogue listing

Contents - Bushing 91833 x1
- Bushing 91834 x1
- Bushing 91835 x4
- Steel tube 22.2x14.3x62 x1
- Steel tube 19x11x62 x1
- Steel tube 16x12.9x33 x2
- Grease

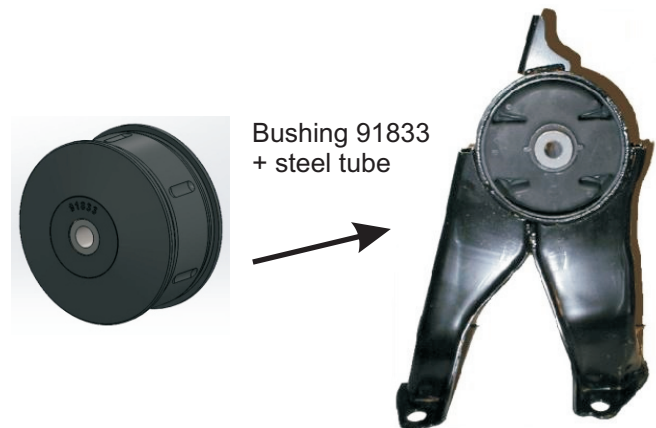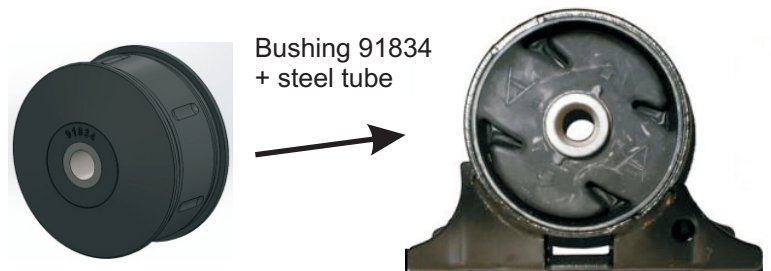

Bushings 91835
+ steel tubes



N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.