

Instructions

Transmission Mount

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

- Raise vehicle evenly and safely support.

Never rely on a Jack only.

Note - the original transmission cross-member is known to crack near mount bolts - check and replace cross-member if necessary.

- Support transmission and proceed to remove cross-member and old rubber mount (use timber to not damage transmission)

Note - the upper bolts to transmission will have to be re-used.


- Bolt up new mount with supplied hardware (for lower holes only)
- Test drive and re-check all bolts after 100 miles.

Application - Ford Mustang 1984-86
 - Ford Granada 1981-82
 - Mercury Cougar 1980-82

Always refer complete catalogue listing

Contents - Trans Mount 91686 x1
 - 7/16 bolts x2
 - Flat washer x2
 - Spring washer x2

Use new supplied 7/16 bolts and washers on the outer holes only (disregard middle hole)

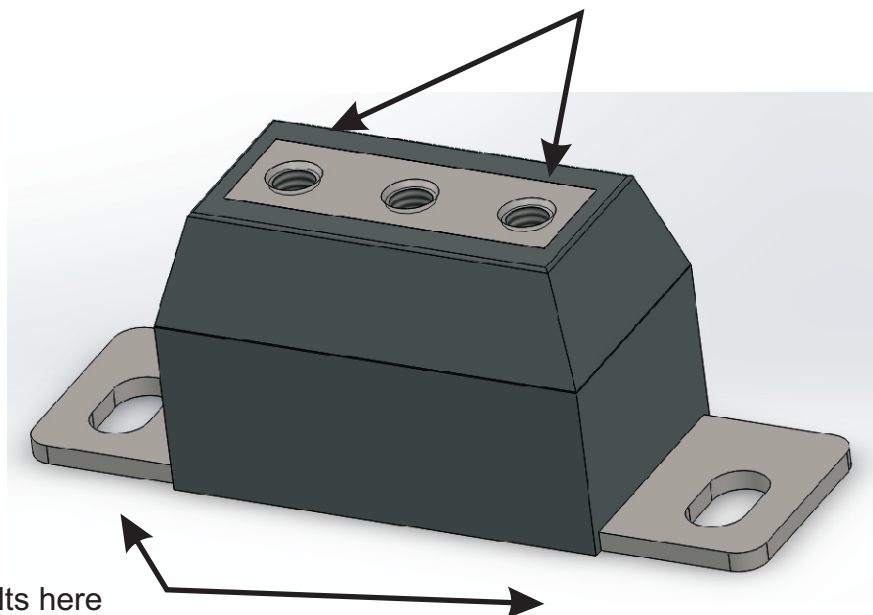

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.