


Instructions

Steering Rack Mount

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

1. Raise vehicle evenly and safely support.
2. There are 2 main nuts holding Rack in position - loosen and remove both nuts (there is a sleeve as part of nut)
3. Behind rack is also a half sleeve - push this out.
4. Pry rubber bushings out.
5. Clean Rack eyelets of any dirt or burs.
6. Push new supplied 2-piece bushings into place (grease not required).
7. Re-fit sleeves/nut - tighten to manufacturers spec.
8. A wheel alignment is recommended.
9. Re-check nuts after initial 100kms travelled.

Un-bolt front nut (with sleeve), then pry out rubber bushing.

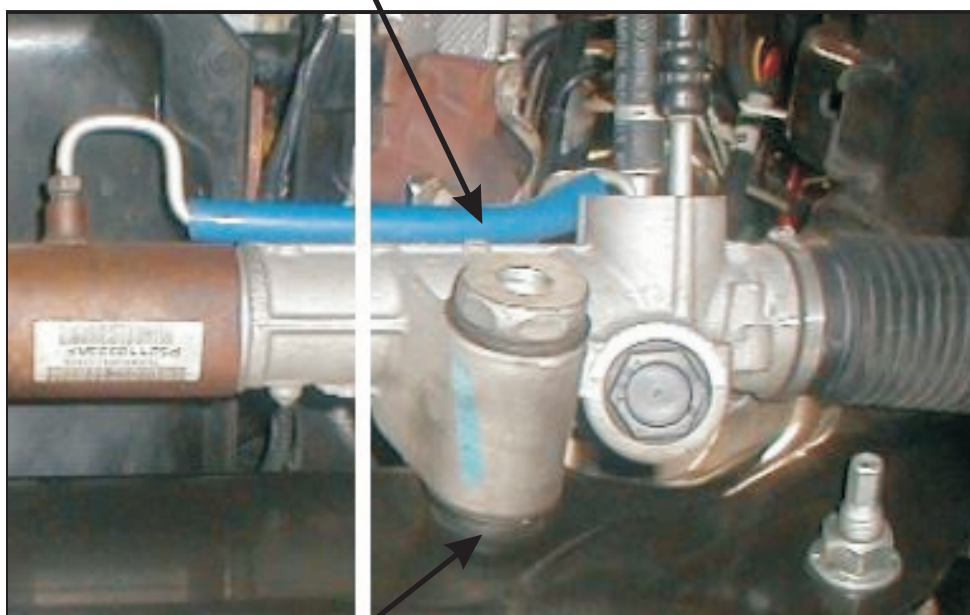

Remove rear Inner Sleeve, then pry our rubber bushing.

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.