

Instructions

Steering Rack - Bushings

This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Application -Dodge Dakota
- 1987-1996

- Raise vehicle evenly and safely support.

Never rely on a Jack only

(Always refer catalogue for complete vehicle listing)

- Place steering wheel in the steer ahead position.
Lock steering wheel from turning.
- Proceed to unbolt rack from sub-frame.
- The factory bushings should pop out with ease.


Contents - Bushing 91887 x2
- Bushing 91888 x2
- Grease

Note - must re-use original factory inner steel tubes and hardware.

- Clean Rack housing thoroughly. Using small amount of supplied grease, push new bushings in position - refer image below.
- Re-fit Rack to vehicle.

Note - be sure the pinion shaft never comes away from steering column.

- Road test - re-check all bolts after 100kms

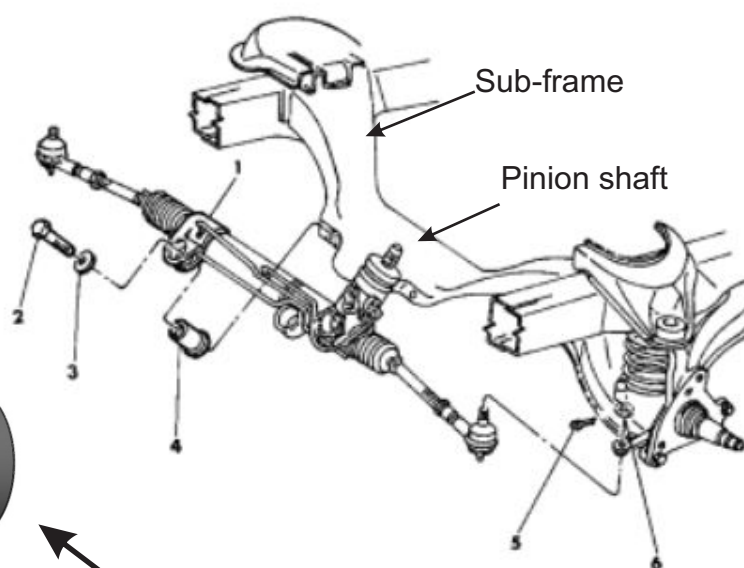

Bushing 91888 - front

Bushing 91887 - rear

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.